

FABRIC TEST REPORT **PVC**



DEAR READER,

This combined document contains all test reports for the PVC tarpaulin that we use in our shelters. The document provides insight into strength, durability, chemical composition and fire classification, including the corresponding measurement values and test report numbers from TÜV SÜD and SGS.

The reports demonstrate that the material is sufficiently strong, correctly constructed, and compliant with the relevant legislation and regulations in the areas of chemistry, fire safety and mechanical properties.

The following tests and standards are included:

- UV exposure and tensile strength according to ISO 4892-3:2024 and EN ISO 1421:2016 (UV test report PVC green).
- Tensile test according to ISO 13934-1:2013 (tensile test).
- Tear strength according to ISO 13937-1:2000 (tear strength).
- Chemical safety according to Regulation (EC) No. 1907/2006 (REACH) Annex XVII:
 - Item 50 – Polycyclic Aromatic Hydrocarbons (PAHs)
 - Item 63 – Lead content
 - Item 20 – Organotin content.
- Persistent organic pollutants according to Regulation (EU) 2019/1021 (POPs) – SCCP (short-chain chlorinated paraffins).
- Fire behaviour according to DIN 4102-1:1998-05, classification B2: Fire behaviour of building materials and building components – Part 1: Classification of building materials, requirements and testing.
- Fire classification according to EN 13501-1:2007+A1:2009, reaction to fire, classified as Bs1,d0 (SGS test report PVC coated tarpaulin 610 g/m², report no. AJD201106078).

QUESTIONS?

Our team is happy to think along with you and answer your questions!

+31 26 700 9 700

sales@kroftman.com



Test Report

No.: 70.404.25.11034.04

Dated: 2025-04-30



Applicant: BACO GROUP LIMITED
Address: SUITE 1126, 11TH FLOOR OCEAN CENTRE, HARBOUR CITY, 5 CANTON ROAD
Product Name: TARPAULIN
Product Type / End use: TENT COVER
Model No.: 610g PVC
Country of Destination: EUROPE, USA, AUSTRALIA, CANADA
Receipt Date of Sample: 2025-04-16
Date of Testing: From 2025-04-16 to 2025-04-23
Sample Submitted: The sample(s) was (were) submitted by applicant and identified.
Test Result: Refer to the data listed in following pages

Test Specification(s) or Test Item(s):

1. Tensile test according to ISO 13934-1:2013
2. Tear strength according to ISO 13937-1:2000

Conclusions:

See the results

See the results

Hardline laboratory

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
Testing Center

Prepared by:

Authorized by:

LIU, XIN (STACIE)
PROJECT HANDLER



GU, XIAODONG (MARK)
DESIGNATED REVIEWER

Note:





- (1) The TÜV SÜD Certification and Testing (China) Co., Ltd. "General Terms & Conditions" applied.
Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see "Testing, Certification, Validation and Verification Regulations", chapter A-3.3.
For full version, please visit: EN : <https://www.tuvsud.cn/zh-cn/resource/terms-and-conditions---en> ; SCN: <https://www.tuvsud.cn/zh-cn/terms-and-conditions> ; TCN: <https://www.tuvsud.com/zh-tw/terms-and-conditions>
- (2) Sample and (or) material information is provided by the client. TÜV SÜD assumes no responsibility for verifying the accuracy, appropriateness and (or) completeness of the information provided by the client.
- (3) The testing results are only valid for the sample tested.
- (4) The test report shall not be reproduced except in full without the written approval of the laboratory.
- (5) Disclaimer Measurement Uncertainty:
Unless otherwise agreed upon, Pass or Fail verdicts are given based on the measured values without any considerations of measurement uncertainties.
Please note, every test method has a measurement uncertainty which has been evaluated by the laboratory according to ISO/IEC 17025 requirements. By taking measurement uncertainties into account it might happen that measured values can neither be assessed as Pass nor as Fail.

Laboratory:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, Testing Center
Building B,C, No. 1999 and Building D, No. 2059, Duhui
Road, Minhang District, Shanghai

Phone: +86 21 60376300
Fax: +86 21 60376350
<https://www.tuvsud.com>

Regd. Office:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, TÜV SÜD Group
Floor 11-12, No 151, Hengtong Road, Jing'an District, Shanghai

Description of the test subject:

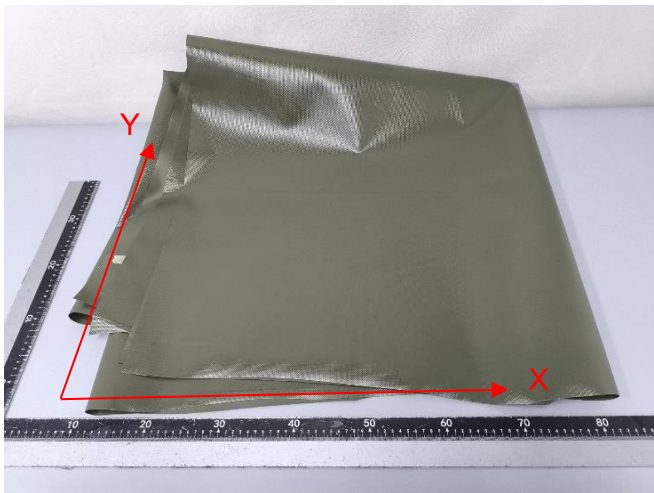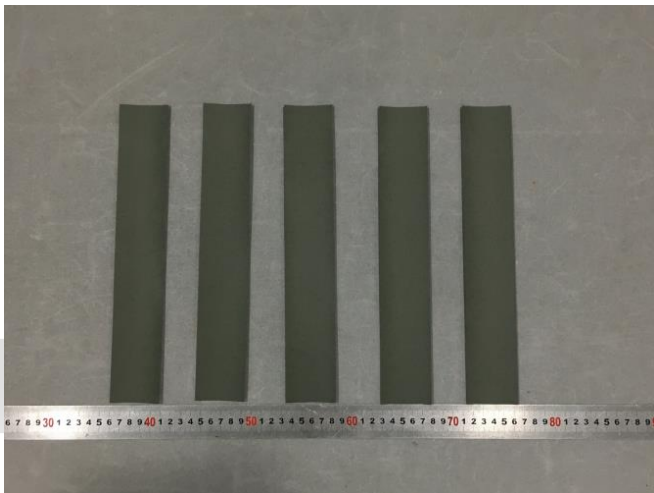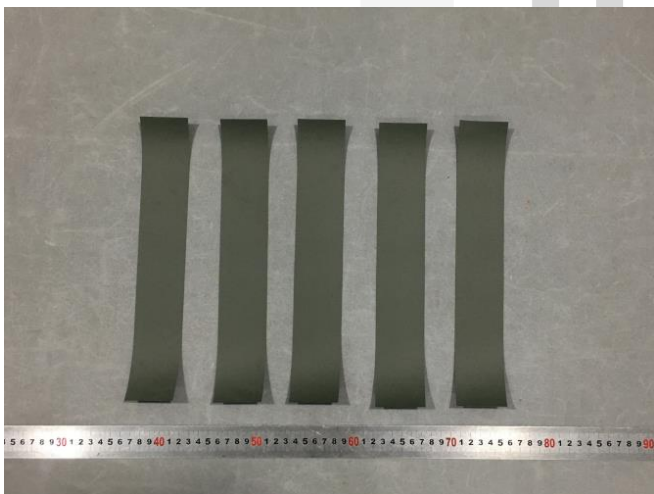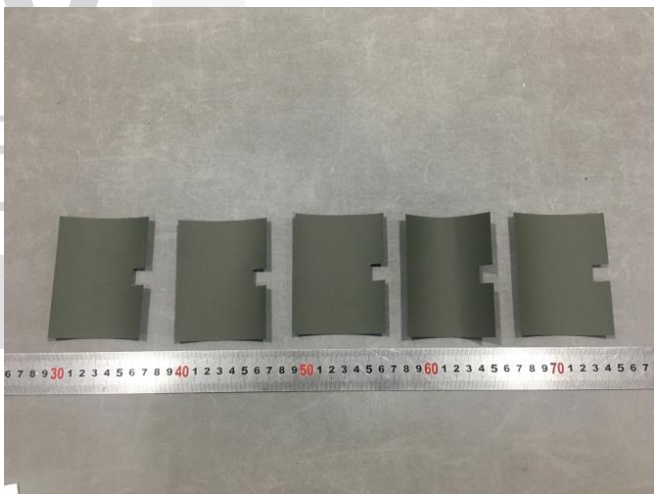
1	Product Description	Green fabric
As received		Tensile test pieces-X
		
Tensile test pieces-Y		Tear test pieces-X
		

Test Report

No.: 70.404.25.11034.04

Dated: 2025-04-30

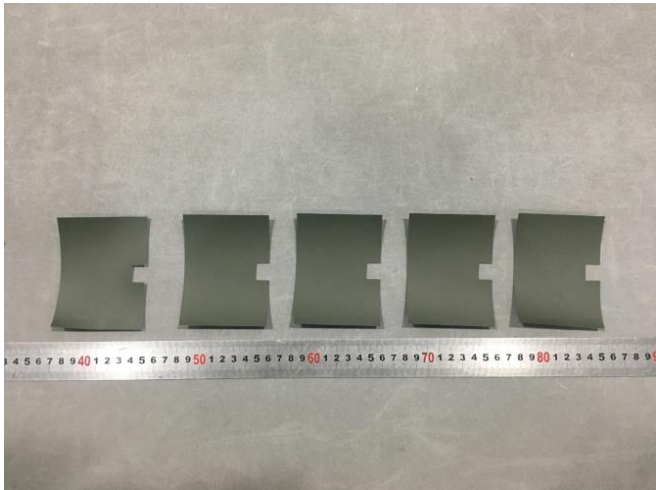

Tear test pieces-Y	/
	/



Test Report

No.: 70.404.25.11034.04

Dated: 2025-04-30



Test Results:

1. Tensile test:

Test method : ISO 13934-1:2013

Test condition : 23.5°C, 51.4%RH

Gauge length: 150mm

Rate of elongation: 300mm/min

Specimen state: conditioned

Sample width: 50mm

Results :

Sample	Maximum force, N	Elongation, %	Maximum force, N	Elongation, %
	X		Y	
1	2589.3	29.7	2888.1	27.2
2	2465.8	29.4	3082.6	30.0
3	2870.6	33.6	2961.9	28.8
4	2769.5	32.3	2851.9	27.6
5	2476.6	29.7	2894.2	28.2
Average	2634.4	30.9	2935.8	28.3

Test Report

No.: 70.404.25.11034.04

Dated: 2025-04-30



2. Tearing strength:

Test method : ISO 13937-1:2000, single tear method

Test condition : As received

Jaw separation : 100mm

Rate of extension : 100mm/min

Results :

Sample.	Tear strength (X), N	Tear strength (Y), N
1	>125	104
2	>125	104
3	>125	105
4	>125	92
5	>125	99
Average	>125	101

-End of Test Report-

Test Report

No.: 70.404.25.11034.07

Dated: 2025-05-13



Applicant: BACO GROUP LIMITED
Address: SUITE 1126, 11TH FLOOR OCEAN CENTRE, HARBOUR CITY, 5 CANTON ROAD
Product Name: TARPAULIN
Product Type / End use: TENT COVER
Model No.: 610g PVC
Country of Destination: EUROPE, USA, AUSTRALIA, CANADA
Receipt Date of Sample: 2025-04-16
Date of Testing: From 2025-04-16 to 2025-04-30
Sample Submitted: The sample(s) was (were) submitted by applicant and identified.
Test Result: Refer to the data listed in following pages

Test Specification(s) or Test Item(s):

1. UV exposure and tensile test

Conclusions:

See the results

Hardline laboratory

TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
Testing Center

Prepared by:


LIU, XIN (STACIE)
PROJECT HANDLER

Authorized by:



GU, XIAODONG (MARK)
DESIGNATED REVIEWER

Note:



- (1) The TÜV SÜD Certification and Testing (China) Co., Ltd. "General Terms & Conditions" applied.
Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production. For further details please see "Testing, Certification, Validation and Verification Regulations", chapter A-3.3.
For full version, please visit: EN : <https://www.tuvsud.cn/zh-cn/resource/terms-and-conditions---en> ; SCN: <https://www.tuvsud.cn/zh-cn/terms-and-conditions> ; TCN: <https://www.tuvsud.com/zh-tw/terms-and-conditions>
- (2) Sample and (or) material information is provided by the client. TÜV SÜD assumes no responsibility for verifying the accuracy, appropriateness and (or) completeness of the information provided by the client.
- (3) The testing results are only valid for the sample tested.
- (4) The test report shall not be reproduced except in full without the written approval of the laboratory.
- (5) Disclaimer Measurement Uncertainty:
Unless otherwise agreed upon, Pass or Fail verdicts are given based on the measured values without any considerations of measurement uncertainties.
Please note, every test method has a measurement uncertainty which has been evaluated by the laboratory according to ISO/IEC 17025 requirements. By taking measurement uncertainties into account it might happen that measured values can neither be assessed as Pass nor as Fail.

Laboratory:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, Testing Center
Building B,C, No. 1999 and Building D, No. 2059, Duhui Road, Minhang District, Shanghai

Phone: +86 21 60376300
Fax: +86 21 60376350
<https://www.tuvsud.com>

Regd. Office:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, TÜV SÜD Group
Floor 11-12, No 151, Hengtong Road, Jing'an District, Shanghai

Description of the test subject:

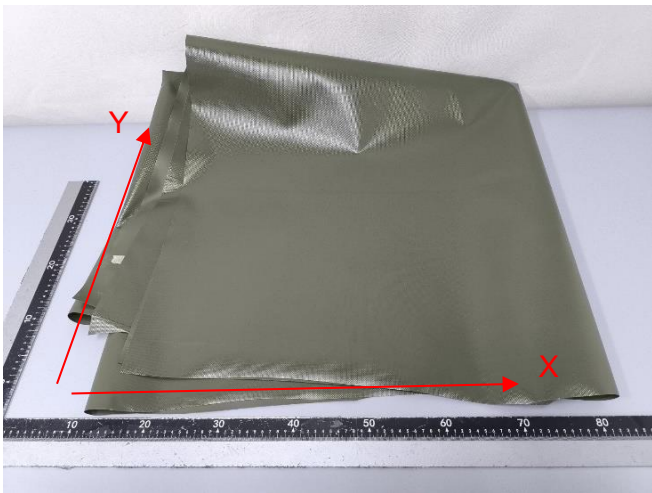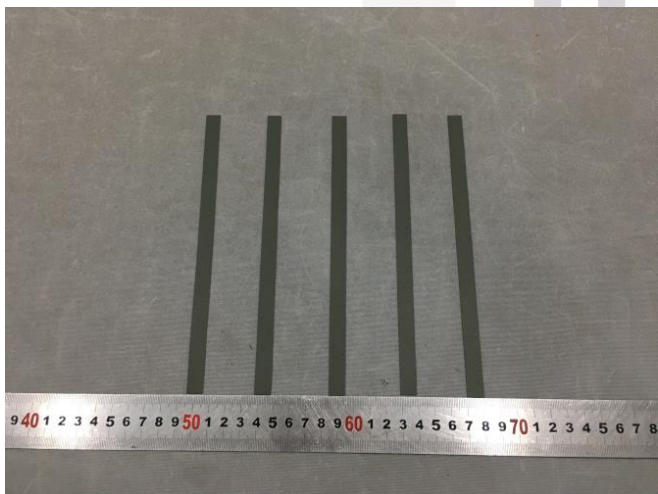1	Product Description	White fabric
As received		
		
X-unexposed sample		Y-unexposed sample
		

Test Report

No.: 70.404.25.11034.07
Dated: 2025-05-13







X-exposed sample-60h	Y-exposed sample-60h
X-exposed sample-120h	Y-exposed sample-120h

Test Report

No.: 70.404.25.11034.07
Dated: 2025-05-13

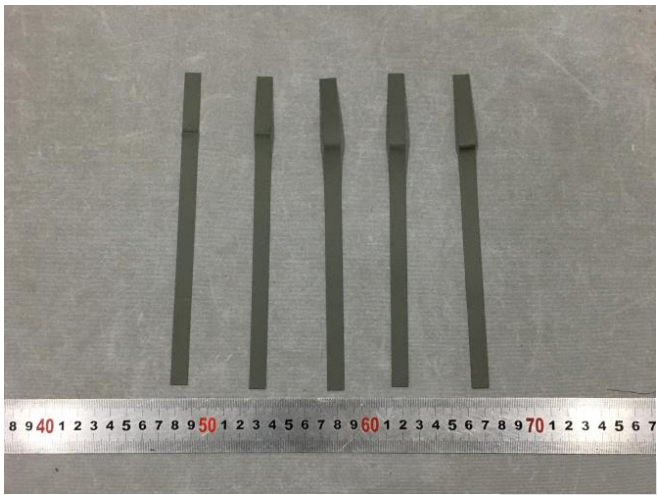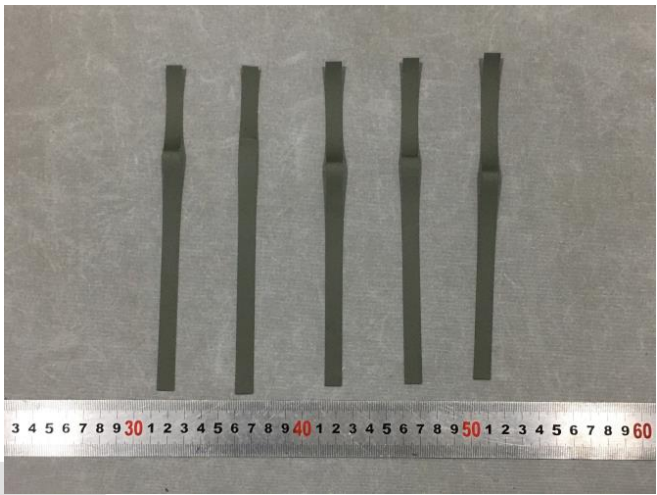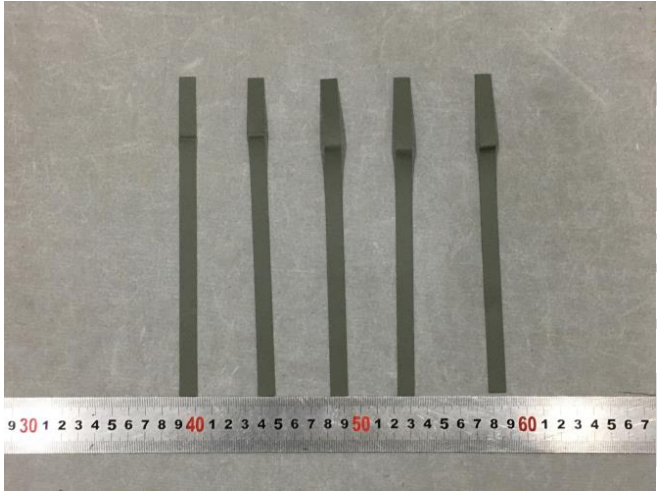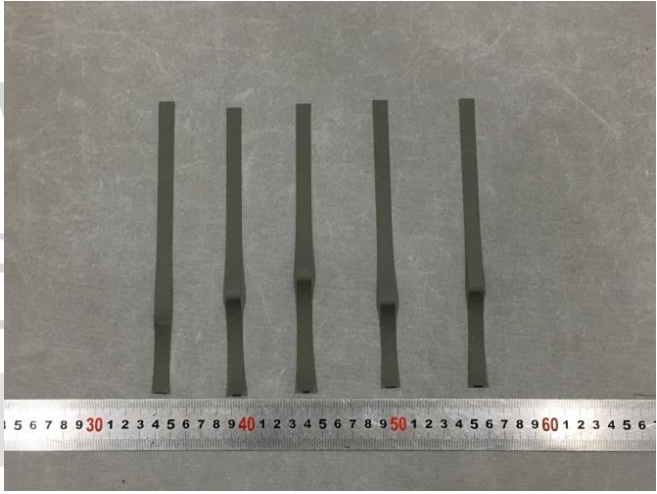





X-exposed sample-180h 	Y-exposed sample-180h 
X-exposed sample-240h 	Y-exposed sample-240h 

Laboratory:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, Testing Center
Building B,C, No. 1999 and Building D, No. 2059, Duhui
Road, Minhang District, Shanghai

Phone: +86 21 60376300
Fax: +86 21 60376350
<https://www.tuvsud.com>

Regd. Office:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, TÜV SÜD Group
Floor 11-12, No 151, Hengtong Road, Jing'an District, Shanghai

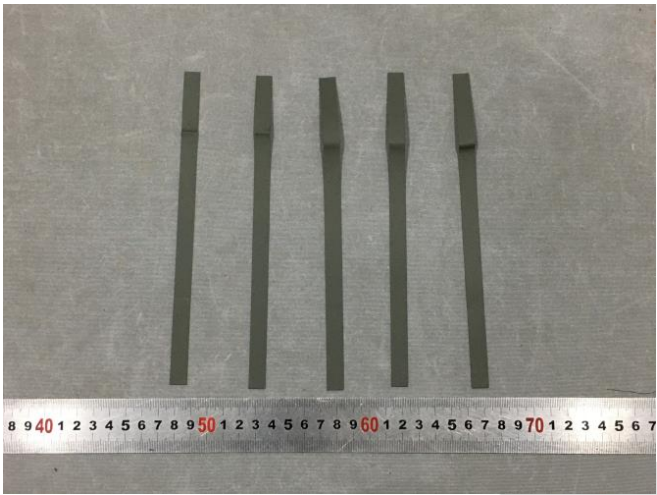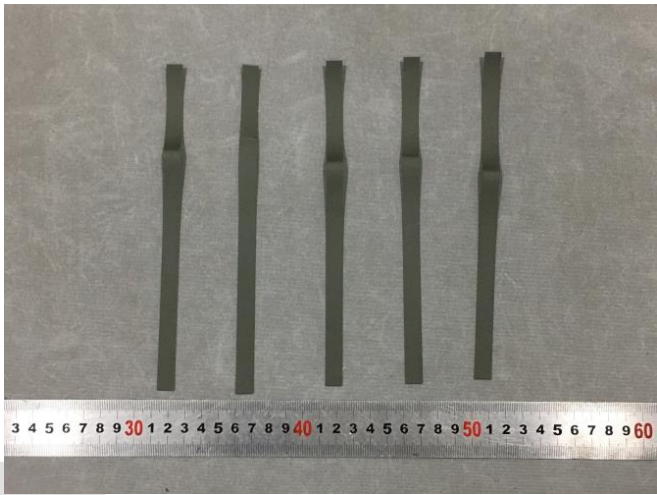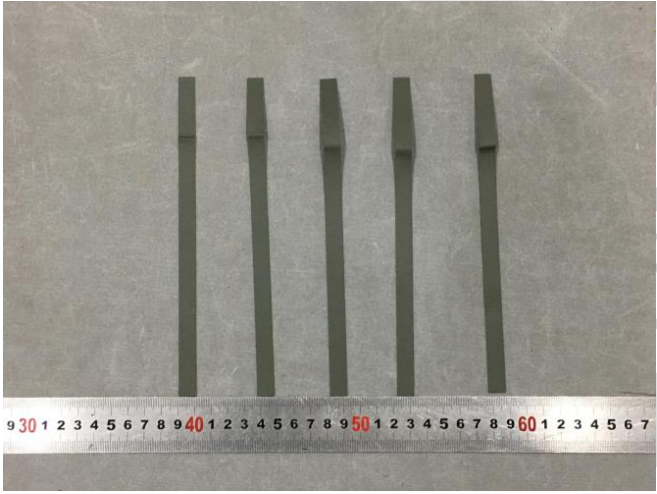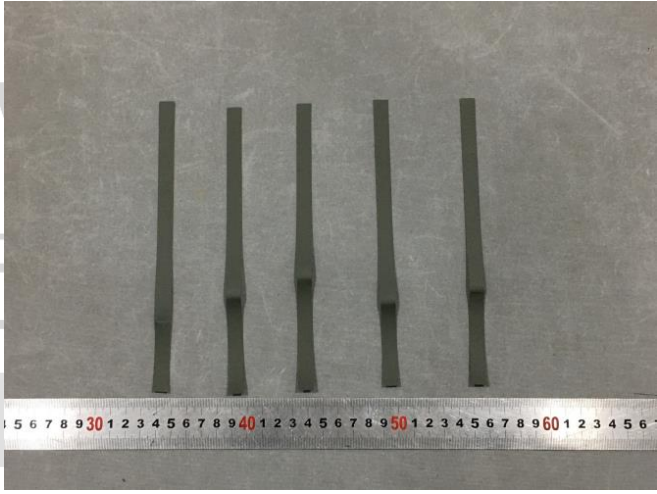

X-exposed sample-180h 	Y-exposed sample-180h 
X-exposed sample-240h 	Y-exposed sample-240h 

Test Report

No.: 70.404.25.11034.07

Dated: 2025-05-13



Test Results:

1. UV exposure & tensile test:

Test method : ISO 4892-3:2024 Method A cycle1 & EN ISO 1421:2016 Method 1

UV test condition :	Exposure period	Lamp type	Irradiance	BPT
	8h dry	UVA-	(0.76 ±0.02)W/m ² @340nm	60°C ± 3°C
	4h condensation	340(type 1A)	UV lamps off	50°C ± 3°C

Duration 60 hours, 120 hours, 180 hours, 240 hours

Tensile test condition : Gauge length: 100mm
Rate of extension: 100mm/min

Results :

Sample		Tensile strength, N/5cm						Tensile Loss, %
		1	2	3	4	5	Avg.	
X	Original sample	2585.8	2456.7	2712.6	2681.4	2725.7	2632.4	/
	After 60h exposure	2538.4	2565.4	2631.3	2752.4	2425.4	2582.6	-1.9
	After 120h exposure	2586.1	2583.8	2528.9	2210.8	2526.4	2487.2	-5.5
	After 180h exposure	2529.5	2566.7	2512.0	2487.7	2450.9	2508.1	-4.7
	After 240h exposure	2530.9	2473.3	2022.6	2544.0	2396.2	2393.4	-9.1
Y	Original sample	3017.5	3141.4	3145.4	3137.6	2909.2	3070.2	/
	After 60h exposure	3195.1	2807.3	2946.8	3315.5	2578.1	2968.5	-3.3
	After 120h exposure	2878.4	2834.7	3208.3	2976.7	2921.0	2963.8	-3.5
	After 180h exposure	2684.8	2753.2	3088.6	2799.7	3176.1	2900.5	-5.5
	After 240h exposure	3236.7	3025.5	3005.4	3004.5	2865.2	3027.5	-1.4

-End of Test Report-

Test Report

No.: 70.404.25.11034.01

Date: 2025-04-27



Applicant: BACO GROUP LIMITED
Address: SUITE 1126, 11TH FLOOR OCEAN CENTRE, HARBOUR CITY, 5 CANTON ROAD, TSIM SHA TSUI, KOWLOON, HONG KONG
Product Name: TARPAULIN
Model No: 610g PVC
End Use: TENT COVER
Country of Destination: EUROPE,USA,AUSTRALIA,CANADA
Receipt Date of Sample: 2025-04-15
Date of Testing: 2025-04-15 ~ 2025-04-27
Sample Submitted: The sample(s) was (were) submitted by applicant and identified.
Test Result: Refer to the data listed in following pages

Test Item	Conclusion
1. Regulation (EC) No.1907/2006 (REACH) Annex XVII, Item 50 - Polycyclic Aromatic Hydrocarbons (PAHs)	Pass
2. Regulation (EC) No.1907/2006 (REACH) Annex XVII, Item 63 - Lead Content	Pass
3. Regulation (EC) No.1907/2006 (REACH) Annex XVII, Item 20 - Organotin Content	Pass
4. European Parliament and Council Regulation (EU) 2019/1021 on Persistent Organic Pollutants (POPs) - Alkanes C10-C13, chloro (short-chain chlorinated paraffins) (SCCPs)	Pass

Remarks: 1. MDL = Method Detection Limit
2. ND = Not Detected (<MDL)
3. <= Less than
4. 1 mg/kg = 1 ppm = 0.0001%
5. Test items and samples were specified by client.

Test Report

No.: 70.404.25.11034.01

Date: 2025-04-27



TÜV SÜD Certification and Testing (China) Co., Ltd. Shanghai Branch
Testing Center

Prepared by:

Authorized by:



Jenny Yao
Technical Engineer

Sawyer Tang
Technical Manager

Note:

- (1) The TÜV SÜD Certification and Testing (China) Co., Ltd. "General Terms & Conditions" applied.
Any use for advertising purposes must be granted in writing. This technical report may only be quoted in full. This report is the result of a single examination of the object in question. It does not imply a general statement regarding the quality of products from regular production.
For further details, please see "Testing, Certification, Validation and Verification Regulations", chapter A-3.3.
For full version, please visit: EN : <https://www.tuvsud.cn/zh-cn/resource/terms-and-conditions---en> ; SCN: <https://www.tuvsud.cn/zh-cn/terms-and-conditions> ; TCN: <https://www.tuvsud.com/zh-tw/terms-and-conditions>
- (2) Sample and (or) material information is provided by the client. TÜV SÜD assumes no responsibility for verifying the accuracy, appropriateness and (or) completeness of the information provided by the client.
- (3) The testing results are only valid for the sample tested.
- (4) The test report shall not be reproduced except in full, without the written approval of the laboratory.
- (5) Disclaimer Measurement Uncertainty:
Unless otherwise agreed upon, Pass or Fail verdicts are given based on the measured values without any considerations of measurement uncertainties. Please note, every test method has a measurement uncertainty which has been evaluated by the laboratory according to ISO/IEC 17025 requirements. By taking measurement uncertainties into account it might happen that measured values can neither be assessed as Pass nor as Fail.

Laboratory:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, Testing Center
Building B,C, No. 1999 and Building D, No. 2059,
Duhui Road, Minhang District, Shanghai

Phone: +86 21 60376300
Fax: +86 21 60376350
<https://www.tuvsud.com>

Regd. Office:
TÜV SÜD Certification and Testing (China) Co., Ltd.
Shanghai Branch, TÜV SÜD Group
Floor 11-12, No 151, Hengtong Road, Jing'an District, Shanghai

Test Report

No.: 70.404.25.11034.01

Date: 2025-04-27



Description of Tested Subject:

Sample	Description	Photo
001	White soft plastic	
002	Green soft plastic	
003	Grey soft plastic	

Test Report

No.: 70.404.25.11034.01

Date: 2025-04-27



Test Result(s):

1. Regulation (EC) No.1907/2006 (REACH) Annex XVII, Item 50 - Polycyclic Aromatic Hydrocarbons (PAHs)

Test with reference to AfPS GS 2019:01PAK, determination by GC-MS.

Parameter	CAS No.	Unit	MDL	Limit	Result(s)
					001+002+003
Benzo[b]fluoranthene (BbFA)	205-99-2	mg/kg	0.1	1	ND
Benzo[a]anthracene (BaA)	56-55-3	mg/kg	0.1	1	ND
Benzo[a]pyrene (BaP)	50-32-8	mg/kg	0.1	1	ND
Benzo[e]pyrene (BeP)	192-97-2	mg/kg	0.1	1	ND
Benzo[j]fluoranthene (BjFA)	205-82-3	mg/kg	0.1	1	ND
Benzo[k]fluoranthene (BkFA)	207-08-9	mg/kg	0.1	1	ND
Chrysene (CHR)	218-01-9	mg/kg	0.1	1	ND
Dibenzo[a,h]anthracene (DBAhA)	53-70-3	mg/kg	0.1	1	ND
Conclusion					Pass

2. Regulation (EC) No.1907/2006 (REACH) Annex XVII, Item 63 - Lead Content

Test with reference to in-house method, determination by ICP-OES.

Sample	Unit	MDL	Limit	Result(s)	Conclusion
001+002+003	mg/kg	10.0	500	ND	Pass

3. Regulation (EC) No.1907/2006 (REACH) Annex XVII, Item 20 - Organotin Content

Test with reference to ISO 17353:2004, determination by GC-MS.

Parameter	MDL [mg/kg]	Limit [mg/kg]	Result(s) [mg/kg]
			001+002+003
DBT	0.025	1000	ND
TBT	0.025	1000	ND
DOT	0.025	1000	ND
TcyT	0.025	1000	ND
TPhT	0.025	1000	ND
Conclusion			Pass



4. European Parliament and Council Regulation (EU) 2019/1021 on Persistent Organic Pollutants (POPs) - Alkanes C10-C13, chloro (short-chain chlorinated paraffins) (SCCPs)

Test with reference to in-house method, determination by GC-MS.

Parameter	CAS No.	Unit	MDL	Limit	Result(s)
					001+002+003
SCCP	85535-84-8	mg/kg	100	1500	ND
Conclusion					Pass

-End of Test Report-





Test Report

No. AJD201106078

Date: JAN.18, 2012

Page 1 of 6

KROFTMAN STRUCTURES BV

VEEM 3 6909DZ BABBERICH

The following sample(s) was / were submitted and identified on behalf of the client as:

Sample Description: PVC COATED TARPAULIN

Type/Style: SW10202F2-610/802

Composition: PVC COMPOUND & PET

Thickness: 0.46mm

End use application: TENT COVER

Test Requested:

EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements—Part 1:

Classification using data from reaction to fire tests, class B.

Test Results: -- See attached sheet --

Test Period:

Sample Receiving Date : DEC.30, 2011

Test Performing Date : DEC.30, 2011 TO JAN.17, 2012

Signed for and on behalf of
SGS-CSTC Co., Ltd.

Allen Zou
Technical Supervisor

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, responsibility and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its issuance only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS-CSTC Standards Technical Services Co., Ltd.
Anji Branch

No.301, Yangguang Avenue, District 2, Sunlight Industrial Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.cn.sgs.com
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Member of the SGS Group (SGS SA)

I. Test conducted

This test is conducted as per EN 13501-1:2007+A1:2009 Fire classification of construction products and building elements — Part 1: Classification using data from reaction to fire tests. And the test methods as following:

1. EN 13823:2010 Reaction to fire tests for building products - Building products excluding floorings exposed to the thermal attack by a single burning item.
2. EN ISO 11925-2:2010 Reaction to fire tests — Ignitability of building products subjected to direct impingement of flame — Part 2: Single-flame source test.

II. Details of classified product

a) Nature and end use application

The product "PVC COATED TARPAULIN" is defined as a decorative sheet. Its classification is valid for the following end use application:

"Tent cover"

b) Description

The product "PVC COATED TARPAULIN" is consists of PVC COMPOUND & PET.

Color	White
Thickness*	About 0.46mm
Mass per unit area	About 620g/m ²

*---Measured by laboratory

Mounting and fixing:

The test specimens are fixed mechanically in the trolley, Champed at the top and the bottom, The test specimen are free standing at a distance of 90mm from the backing board, no joint in the long wing of the specimen.

III. Test results

Test method	Parameter	Number of tests	Results
EN 13823	FIGRA (W/s)	3	30.2
	LFS < edge of specimen		Yes
	THR _{600s} (MJ)		3.2
	SMOGR _A (m ² /s ²)		12.6
	TSP _{600s} (m ²)		11.3
	Flaming particles or droplets		No

To be continued...

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, jurisdiction and arbitration clauses and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its issuance and is not intended to be a final statement of the results of the test. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise indicated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Test method	Parameter	Specimen number	Results
EN ISO 11925-2 Exposure = 30 s	$F_s \leq 150$ mm	6	Yes
	Ignition of the filter paper		No

IV. Classification and direct field of application

This classification has been carried out in accordance with **EN 13501-1:2007+A1:2009**.

a) Classification

The product, "PVC COATED TARPAULIN", classification is as following,

Fire behaviour		Smoke production		Flaming droplets
B	—	s	1	, d 0

Reaction to fire classification: B—s1, d0

Remark: The classes with their corresponding fire performance are given in annex A.

b) Field of application

This classification for the submitted sample, is valid for the following end use condition:

- With all substrates classified A1 and A2
- With mechanical fixing
- No joint

This classification is valid for the following product parameters:

- Characteristics are described in § II b of this test reports.

Statement: The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

Warning:

This classification report does not represent type approval or certification of the product.

The test laboratory has, therefore, play no part in sampling the product for the test, although it holds appropriate references to the manufacturer's factory production control that is aimed to be relevant to the samples tested and that will provide for their traceability.

To be continued...

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, jurisdiction and arbitration clauses defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its inspection only and is not intended to constitute a warranty or guarantee, within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise indicated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



SGS Standards Technical Services Co., Ltd.
Anji Branch Laboratory

No.301,Yangguang Avenue,District 2,Sunlight Industrial Zone,Anji County,Zhejiang Province,China 313300 t (86-572) 5018825 f (86-572) 5018829 www.cn.sgs.com
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e sgs.china@sgs.com

Annex A

Classes of reaction to fire performance for construction products excluding floorings and linear pipe thermal insulation products

Class	Test method(s)		Classification criteria	Additional classification
A1	EN ISO 1182 ^a	and	$\Delta T \leq 30^{\circ}\text{C}$, and $\Delta m \leq 50\%$, and $t_f = 0$ (i.e. no sustained flaming)	-
	EN ISO 1716		$PCS \leq 2.0\text{MJ/kg}$ ^a and $PCS \leq 2.0\text{MJ/kg}$ ^{b c} and $PCS \leq 1.4\text{MJ/m}^2$ ^d and $PCS \leq 2.0\text{MJ/kg}$ ^e	-
A2	EN ISO 1182 ^a or	and	$\Delta T \leq 50^{\circ}\text{C}$, and $\Delta m \leq 50\%$, and $t_f \leq 20\text{ s}$	-
	EN ISO 1716		$PCS \leq 3.0\text{MJ/kg}$ ^a and $PCS \leq 4.0\text{MJ/m}^2$ ^b and $PCS \leq 4.0\text{MJ/m}^2$ ^d and $PCS \leq 3.0\text{MJ/kg}$ ^e	-
	EN 13823		$FIGRA \leq 120\text{W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 7.5\text{MJ}$	Smoke production ^f and Flaming droplets/particles ^g
B	EN 13823	and	$FIGRA \leq 120\text{W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 7.5\text{MJ}$	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 ⁱ Exposure = 30s		60s 内 $F_s \leq 150\text{mm}$	
C	EN 13823	and	$FIGRA \leq 250\text{W/s}$ and $LFS < \text{edge of specimen}$ and $THR_{600s} \leq 15\text{MJ}$	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 ⁱ Exposure = 30s		$F_s \leq 150\text{mm}$ within 60 s	
D	EN 13823	and	$FIGRA \leq 750\text{W/s}$	Smoke production ^f and Flaming droplets/particles ^g
	EN ISO 11925-2 ⁱ Exposure = 30s		$F_s \leq 150\text{mm}$ within 60 s	
E	EN ISO 11925-2 ⁱ Exposure = 15s		$F_s \leq 150\text{mm}$ within 20 s	flaming droplets/particles ^h

To be continued...


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, jurisdiction and arbitration issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its issuance and is not intended to be used for any other purpose. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated, the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

F	No performance determined
^a For homogeneous products and substantial components of non-homogeneous products. ^b For any external non-substantial component of non-homogeneous products. ^c Alternatively, any external non-substantial component having a $PCS \leq 2,0 \text{ MJ/m}^2$, provided that the product satisfies the following criteria of EN 13823: $FIGRA \leq 20 \text{ W/s}$, and $LFS < \text{edge of specimen}$, and $THR_{600s} \leq 4,0 \text{ MJ}$, and $s1$, and $d0$. ^d For any internal non-substantial component of non-homogeneous products. ^e For the product as a whole. ^f In the last phase of the development of the test procedure, modifications of the smoke measurement system have been introduced, the effect of which needs further investigation. This may result in a modification of the limit values and/or parameters for the evaluation of the smoke production. $s1 = \text{SMOGR} \leq 30 \text{ m}^2/\text{s}^2$ and $TSP_{600s} \leq 50 \text{ m}^2$; $s2 = \text{SMOGR} \leq 180 \text{ m}^2/\text{s}^2$ and $TSP_{600s} \leq 200 \text{ m}^2$; $s3 = \text{not } s1 \text{ or } s2$ ^g $d0 = \text{No flaming droplets/ particles in EN 13823 within 600 s}$; $d1 = \text{no flaming droplets/ particles persisting longer than 10 s in EN 13823 within 600 s}$; $d2 = \text{not } d0 \text{ or } d1$. Ignition of the paper in EN ISO 11925-2 results in a d2 classification. ^h Pass = no ignition of the paper (no classification); Fail = ignition of the paper (d2 classification). ⁱ Under conditions of surface flame attack and, if appropriate to the end-use application of the product, edge flame attack.	

To be continued...

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, jurisdiction and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its inspection only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Photo Appendix:

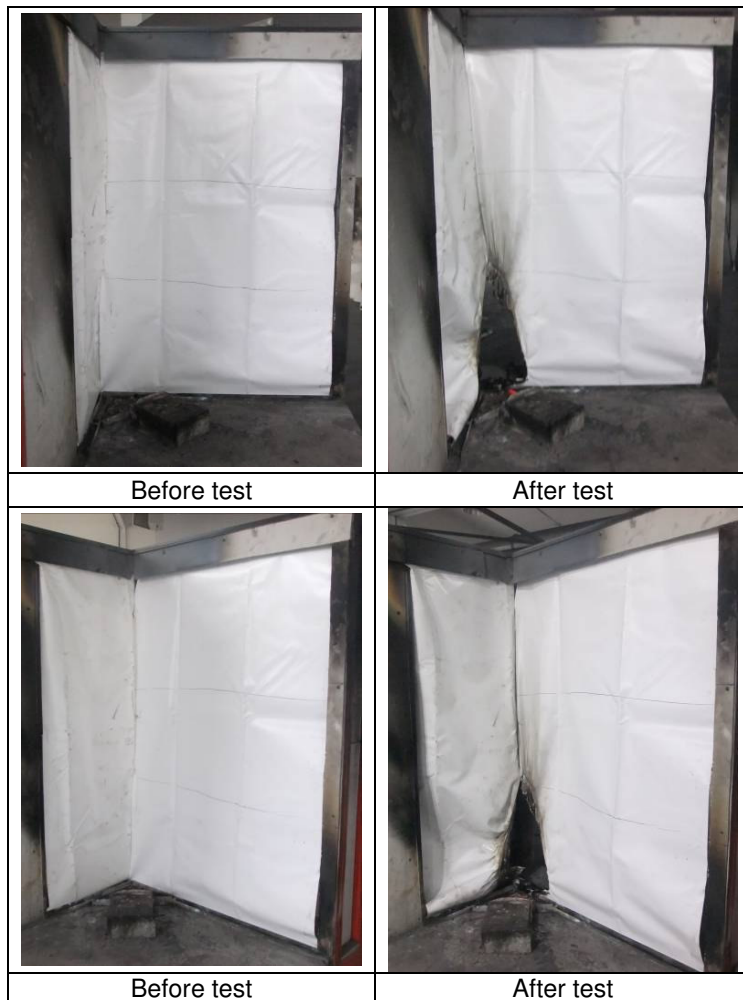

End of Report

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at http://www.sgs.com/terms_and_conditions.htm and for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_e-document.htm. Attention is drawn to the limitation of liability, jurisdiction and arbitration issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its inspection only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise indicated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.



Test Report

Report No.: AJFS2405005872FF

Date: JUN.26, 2024

Page 1 of 6

BACO GROUP LIMITED

SUITE 1126, 11TH FLOOR OCEAN CENTRE, HARBOUR CITY, 5 CANTON ROAD, TSIM SHA TSUI,
KOWLOON, HONG KONG

Sample Name: TARPAULIN

SGS Ref No.: SHIN2405001216CM01

Product Specification: 610g, PVC

Style/Item No.: /

End Use: CONTAINER SHELTER COVER, STORAGE TENT COVER

Country of Destination: EUROPE, USA, AUSTRALIA, CANADA

Country of Origin: CHINA

The above sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

Test Requested:

DIN 4102-1:1998-05 Fire behaviour of building materials and building components, Part 1: Classification of building materials, Requirements and testing, Class B1 materials---For all materials except flooring.

Test Results: -- See attached sheet --

Classification: The tested sample **meets** class **B1** materials requirements of DIN 4102-1:1998-05.

Test Period:

Sample Receiving Date : MAY 30, 2024

Test Performing Date : MAY 30, 2024 TO JUN.17, 2024

Signed for and on behalf of

SGS-CSTC Standards Technical Services Co., Ltd. Anji Branch

Echo

Echo Li

Approved Signatory

Scan to see the report



AJFS2405005872FF

Verification:
check.sgs.com.cn



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.
Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com
No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Test Report

Report No.: AJFS2405005872FF

Date: JUN.26, 2024

Page 2 of 6

I. Test conducted

This test was conducted as per DIN 4102-15:1990 Fire behaviour of building materials and building components – 'Brandschacht' apparatus, DIN 4102-16:2021 Fire behaviour of building materials and building components– 'Brandschacht' tests and DIN 4102-1:1998-05 Clause 6.2.5, and Classification according to DIN 4102-1:1998-05 Clause 6.1 Class B1 materials.

II. Sample details

General description	TARPAULIN (provided by client)
Color	White
Area Density	610 g/m ²
Size of sample	190mm×1000mm & 190mm×90mm & 230mm×90mm
Exposed (tested) surface	Smooth surface

Conditioning

Prior to testing, the sample was conditioned at least 14 days to constant mass at a temperature of 23 ± 2 °C, and a relative humidity of 50 ± 5 %.

III. Test results

1) "Brandschacht" Test according to DIN 4102-15 &16

Results of "Brandschacht" Test (part 1)				
Line No.	Unit	Test direction		
		Lengthwise	Widthwise	
1	Specimen fixings according to DIN 4102 part 15, table	/	/	
2	Max. flame height above lower sample edge;	cm	50	50
3	Time ¹⁾	min:s	01:07	01:23
4	<u>Melting/burning through</u> Time ¹⁾	min:s	00:07	00:08
5	<u>Back of specimen</u> Flaming/glowing, Time ¹⁾	min:s	00:07	00:08
6	Discolouring, Time ¹⁾	min:s	00:04	00:04
7	<u>Burning droplets</u> Begin 1)	min:s	00:24	00:19
8	<u>Amount</u>	/	/	
9	Specimen material falling off in separate droplets	√	√	
	Specimen material falling off continuously	/	/	



Test Report

Report No.: AJFS2405005872FF

Date: JUN.26, 2024

Page 3 of 6

Results of "Brandschacht" Test (part 2)			
Line No.	Unit	Test direction	
		Lengthwise	Widthwise
10	<u>Burning parts</u>	No	No
	Begin 1)	/	/
	Parts of sample falling off separately	/	/
12	Parts of sample falling off continuously	/	/
13	Duration of continued combustion on mesh base (max.)	No	No
14	<u>Burner flame impairment by dripping/falling material</u>	No	No
	Time ¹⁾	/	/
	<u>Premature ending of test</u>	/	/
15	End of burning at specimen ¹⁾	/	/
16	Time when test terminated (if applicable) ¹⁾	/	/
17	<u>Burning after end of test</u>	No	No
	Duration	/	/
	Number of specimens	/	/
	Front of specimen	/	/
	Back of specimen	/	/
21	Height of flame	/	/
22	<u>Glowing after end of test</u>	No	No
	Duration	/	/
	Number of specimens	/	/
	Front of specimen	/	/
	Back of specimen	/	/
	Top half of specimen	/	/
	Bottom half of specimen	/	/
28	<u>Smoke density</u>	Yes	Yes
	≤ 400 %×min	√	√
	> 400 %×min	/	/



Test Report

Report No.: AJFS2405005872FF

Date: JUN.26, 2024

Page 4 of 6

Results of “Brandschacht” Test (part 3)							
Line No. Unit			Test direction				
			Lengthwise		Widthwise		
30	<u>Residual length</u>		/		/		
	Single results	cm	56	53	55	57	
			54	54	54	55	
31	Average of the single results		cm	54.3		55.3	
	<u>Smoke temperature</u>			/		/	
32	Max. of average		℃	145.8		141.2	
33	Time ¹⁾		min:s	05:07		04:49	

Note: ¹⁾ time from start of testing

*Reduction in number of test (*DIN 4102 Part 16, clause 5.2*)

Class B1 materials:

If the residual length measured after the first test is 45cm or greater, further tests are not required.

2) Ignitibility test according to DIN 4102-1 Clause 6.2.5

a) Surface ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Afterflame time (s)	7	5	8	7	6	6	8	7	9	5
Max. flame height (cm)	5	5	7	6	6	7	7	6	8	7
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Slight					Slight				



Test Report

Report No.: AJFS2405005872FF

Date: JUN.26, 2024

Page 5 of 6

b) Edge ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	No	No	No	No	No	No	No	No	No	No
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	23	25	22	23	25	27	24	22	25	26
Afterflame time (s)	147	125	154	133	141	157	148	142	152	131
Max. flame height (cm)	>19	>19	>19	>19	>19	>19	>19	>19	>19	>19
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Medium					Medium				

Note: NA = Not applicable

IV. DIN 4102-1:1998 Criteria for classification

1) All materials, except flooring, may be classed as **B1** materials if they meet the following requirements a) and b):

a) The test using the 'Brandschacht' apparatus described in DIN 4102-15 (cf. subclause 6.1.3.1) shall be deemed passed if

- The mean value for the residual length (portion of specimen that has not burned or charred; cf. subclause 9.1 of DIN 4102-16) of each specimen is at least 15 cm and no individual values are lower than 0 cm,
- The mean effluent temperature does not exceed 200 °C in any test,
- The requirement for the residual length of each specimen is met even where there is afterflame, afterglow, or smouldering.

b) Pass DIN 4102-1:1998 sub-clause 6.2.5 Ignitability Test if

For each specimen, flaming doesn't reach the gage mark within 20s after flame application.

2) Materials may be classed as **B2** materials if they pass the ignitability test specified in DIN 4102-1:1998 subclause 6.2.5.

For each specimen, flaming doesn't reach the gage mark (150mm marks) within 20s after flame application.

3) Combustible materials which cannot be classed as B1 or B2 materials shall be classed as **B3** materials.



Test Report

Report No.: AJFS2405005872FF

Date: JUN.26, 2024

Page 6 of 6

STATEMENTS:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

This test report does not replace any mandatory certification of the product that may be required.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire and smoke hazard of the product in use.

Photo Appendix:



SGS authenticate the photo on original report only

*** End of Report ***



TEST REPORT

No.: AJFTS25002955R02-1_EN

Date: May 30,2025

Page 1 of 4

BACO GROUP LIMITED

SUITE 1126, 11TH FLOOR OCEAN CENTRE, HARBOUR CITY, 5 CANTON ROAD, TSIM SHA TSUI,
KOWLOON, HONG KONG

THE TEST REPORT IS TO SUPERSEDE THE TEST REPORT No.: AJFTS25002955R02_EN, DATE: May 28,2025.

Sample Name : TARPAULIN
Product Specification : 610g, PVC
Style/Item No. : /
End Use : CONTAINER SHELTER COVER, STORAGE TENT COVER
Country of Origin : CHINA
Country of Destination : EUROPE, USA, AUSTRALIA, CANADA

The above sample(s) data and information was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

SGS Ref. No. : SUZIN2505001315PL02
Sample Receiving Date : May 15,2025
Testing Period : May 15,2025 to May 28,2025
Test Required : DIN 4102-1:1998-05 Fire behaviour of building materials and building components Part 1: Classification of building materials, Requirements and testing, Class B2 materials---For all materials except flooring.
Test result(s) : See attached sheet
Conclusion : The tested sample **meets** class **B2** materials requirements of DIN 4102-1:1998-05.

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd Anji Branch

Echo Li

Echo Li
Approved signatory



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

I. Test conducted

This test was conducted as per DIN 4102-1:1998-05 Fire behaviour of building materials and building components Part 1: Classification of building materials, Requirements and testing, Clause 6.2. Class B2 materials.

II. Sample details

Sample description	PVC
Color	Green
Density	610 g/m ²
Size of sample	190mm×90mm & 230mm x 90mm
Exposed (tested) surface	Marking surface (see the photo)

Conditioning

Prior to testing, the sample was conditioned at least 14 days to constant mass at a temperature of 23 ± 2 °C, and a relative humidity of 50 ± 6 %.

III. Test results
1) Surface ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Afterflame time (s)	0	0	0	0	2	8	0	2	1	0
Max. flame height (cm)	6	7	5	7	6	8	6	7	6	7
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Medium					Medium				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

2) Edge ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	No	No	No	No	No	No	No	No	No	No
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	24	23	22	22	21	24	26	25	24	29
Afterflame time (s)	132	118	122	127	108	107	141	132	126	121
Max. flame height (cm)	>19	>19	>19	>19	>19	>19	>19	>19	>19	>19
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Large					Large				

Note: NA = Not applicable

DIN 4102-1: 1998-05 Criteria for B2/B3 classification

- 1) Materials may be classed as **B2** materials if they pass the ignitibility test specified in DIN 4102-1: 1998 subclause 6.2.5: For each specimen, flaming doesn't reach the gage mark within 20s after flame application.
- 2) Combustible materials which cannot be classed as B1 or B2 materials shall be classed as **B3** materials.

STATEMENTS:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

This test report does not replace any mandatory certification of the product that may be required.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire and smoke hazard of the product in use.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Photo Appendix:



SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com



TEST REPORT

No.: AJFTS25002955R01-1_EN

Date: May 30,2025

Page 1 of 4

BACO GROUP LIMITED

SUITE 1126, 11TH FLOOR OCEAN CENTRE, HARBOUR CITY, 5 CANTON ROAD, TSIM SHA TSUI,
KOWLOON, HONG KONG

THE TEST REPORT IS TO SUPERSEDE THE TEST REPORT No.: AJFTS25002955R01_EN, DATE: May 28,2025.

Sample Name : TARPAULIN
Product Specification : 610g, PVC
Style/Item No. : /
End Use : CONTAINER SHELTER COVER, STORAGE TENT COVER
Country of Origin : CHINA
Country of Destination : EUROPE, USA, AUSTRALIA, CANADA

The above sample(s) data and information was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion arising therefrom. Results apply to the sample as received.

SGS Ref. No. : SUZIN2505001315PL01
Sample Receiving Date : May 15,2025
Testing Period : May 15,2025 to May 28,2025
Test Required : DIN 4102-1:1998-05 Fire behaviour of building materials and building components Part 1: Classification of building materials, Requirements and testing, Class B2 materials---For all materials except flooring.
Test result(s) : See attached sheet
Conclusion : The tested sample **meets** class **B2** materials requirements of DIN 4102-1:1998-05.

Signed for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd Anji Branch

Echo Li

Echo Li
Approved signatory

Scan to see the report



AJFTS25002955R01-1
Verification:
check.sgsonline.com.cn



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Member of the SGS Group (SGS SA)

I. Test conducted

This test was conducted as per DIN 4102-1:1998-05 Fire behaviour of building materials and building components Part 1: Classification of building materials, Requirements and testing, Clause 6.2. Class B2 materials.

II. Sample details

Sample description	PVC
Color	Grey
Density	610 g/m ²
Size of sample	190mm×90mm & 230mm×90mm
Exposed (tested) surface	Marking surface (see the photo)

Conditioning

Prior to testing, the sample was conditioned at least 14 days to constant mass at a temperature of 23 ± 2 °C, and a relative humidity of 50 ± 6 %.

III. Test results
1) Surface ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	NA	NA	NA	NA	NA	NA	NA	NA	NA	NA
Afterflame time (s)	0	0	0	0	0	0	0	0	0	0
Max. flame height (cm)	6	7	6	8	7	7	7	6	8	7
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Medium					Medium				



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

2) Edge ignition

Fire application time: 15s

Parameter	Lengthwise					Widthwise				
	1	2	3	4	5	6	7	8	9	10
Whether or not flaming extinguished before reach the gauge mark (Yes/No)	Yes	Yes	Yes	No	No	Yes	No	No	Yes	Yes
Whether or not flaming reach the measuring mark within 20 seconds (Yes/No)	No	No	No	No	No	No	No	No	No	No
Time for the flame tip to reach the gauge mark (s)	NA	NA	NA	23	25	NA	25	22	NA	NA
Afterflame time (s)	14	6	1	90	98	7	89	103	1	2
Max. flame height (cm)	13	9	7	>19	>19	9	>19	>19	7	8
Molten dripping (Yes/No)	No	No	No	No	No	No	No	No	No	No
Smoke developments (visual impression)	Large					Large				

Note: NA = Not applicable

DIN 4102-1: 1998-05 Criteria for B2/B3 classification

- Materials may be classed as **B2** materials if they pass the ignitibility test specified in DIN 4102-1: 1998 subclause 6.2.5: For each specimen, flaming doesn't reach the gage mark within 20s after flame application.
- Combustible materials which cannot be classed as B1 or B2 materials shall be classed as **B3** materials.

STATEMENTS:

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

This test report does not replace any mandatory certification of the product that may be required.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire and smoke hazard of the product in use.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgsgroup.com.cn
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com

Photo Appendix:



SGS authenticate the photo on original report only

End of Report



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <https://www.sgs.com/en/Terms-and-Conditions>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com
 中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 sgs.china@sgs.com