





KROFTMAN CT-A-1012-HD-V25 Concrete Wall

Assembly manual for main frame
Montageanleitung für den Hauptrahmen
Manuel d'assemblage du cadre principal

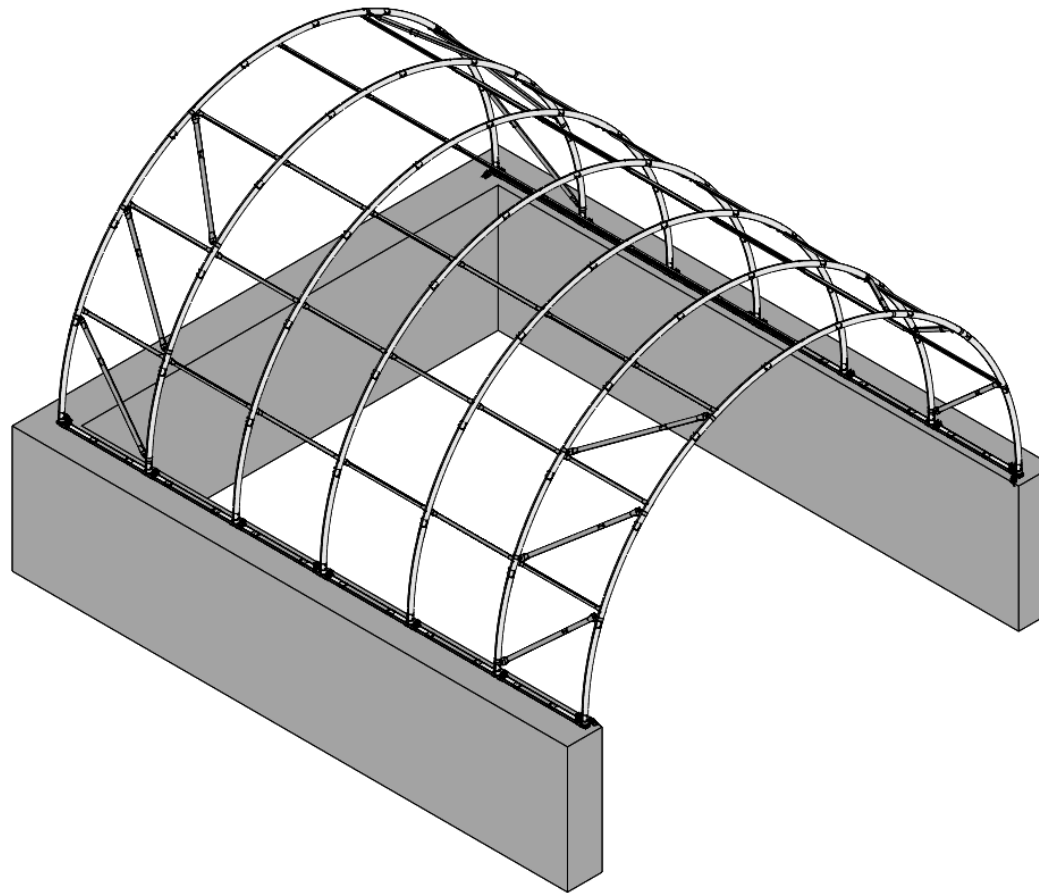

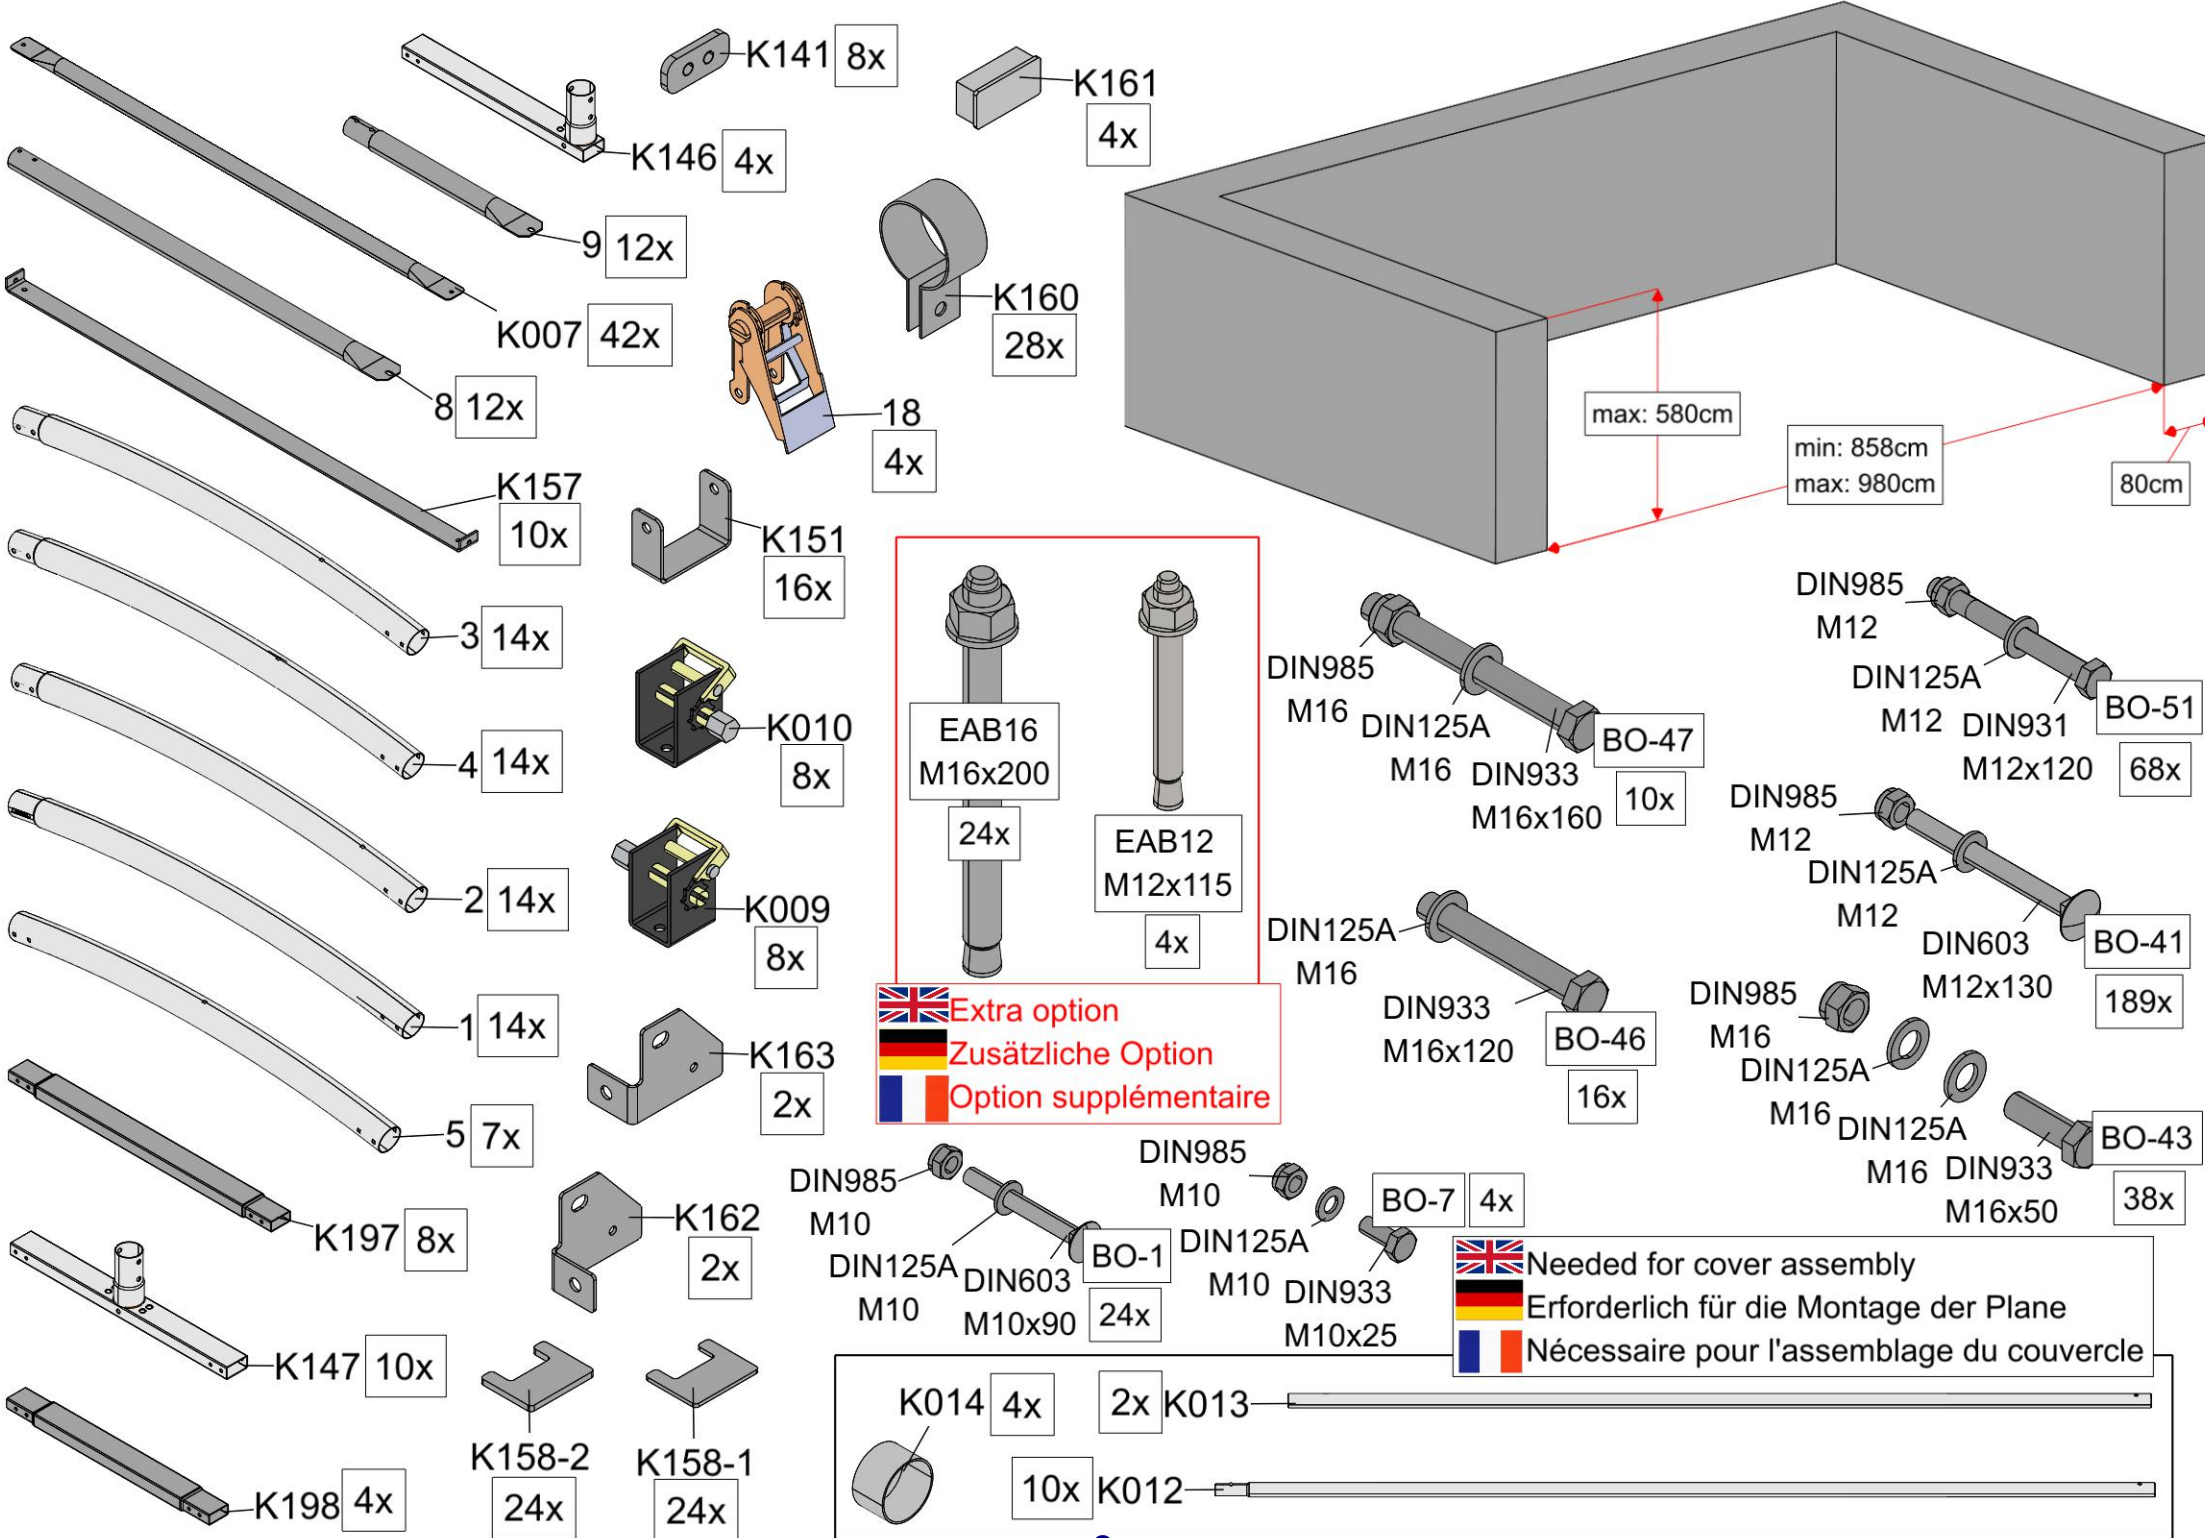

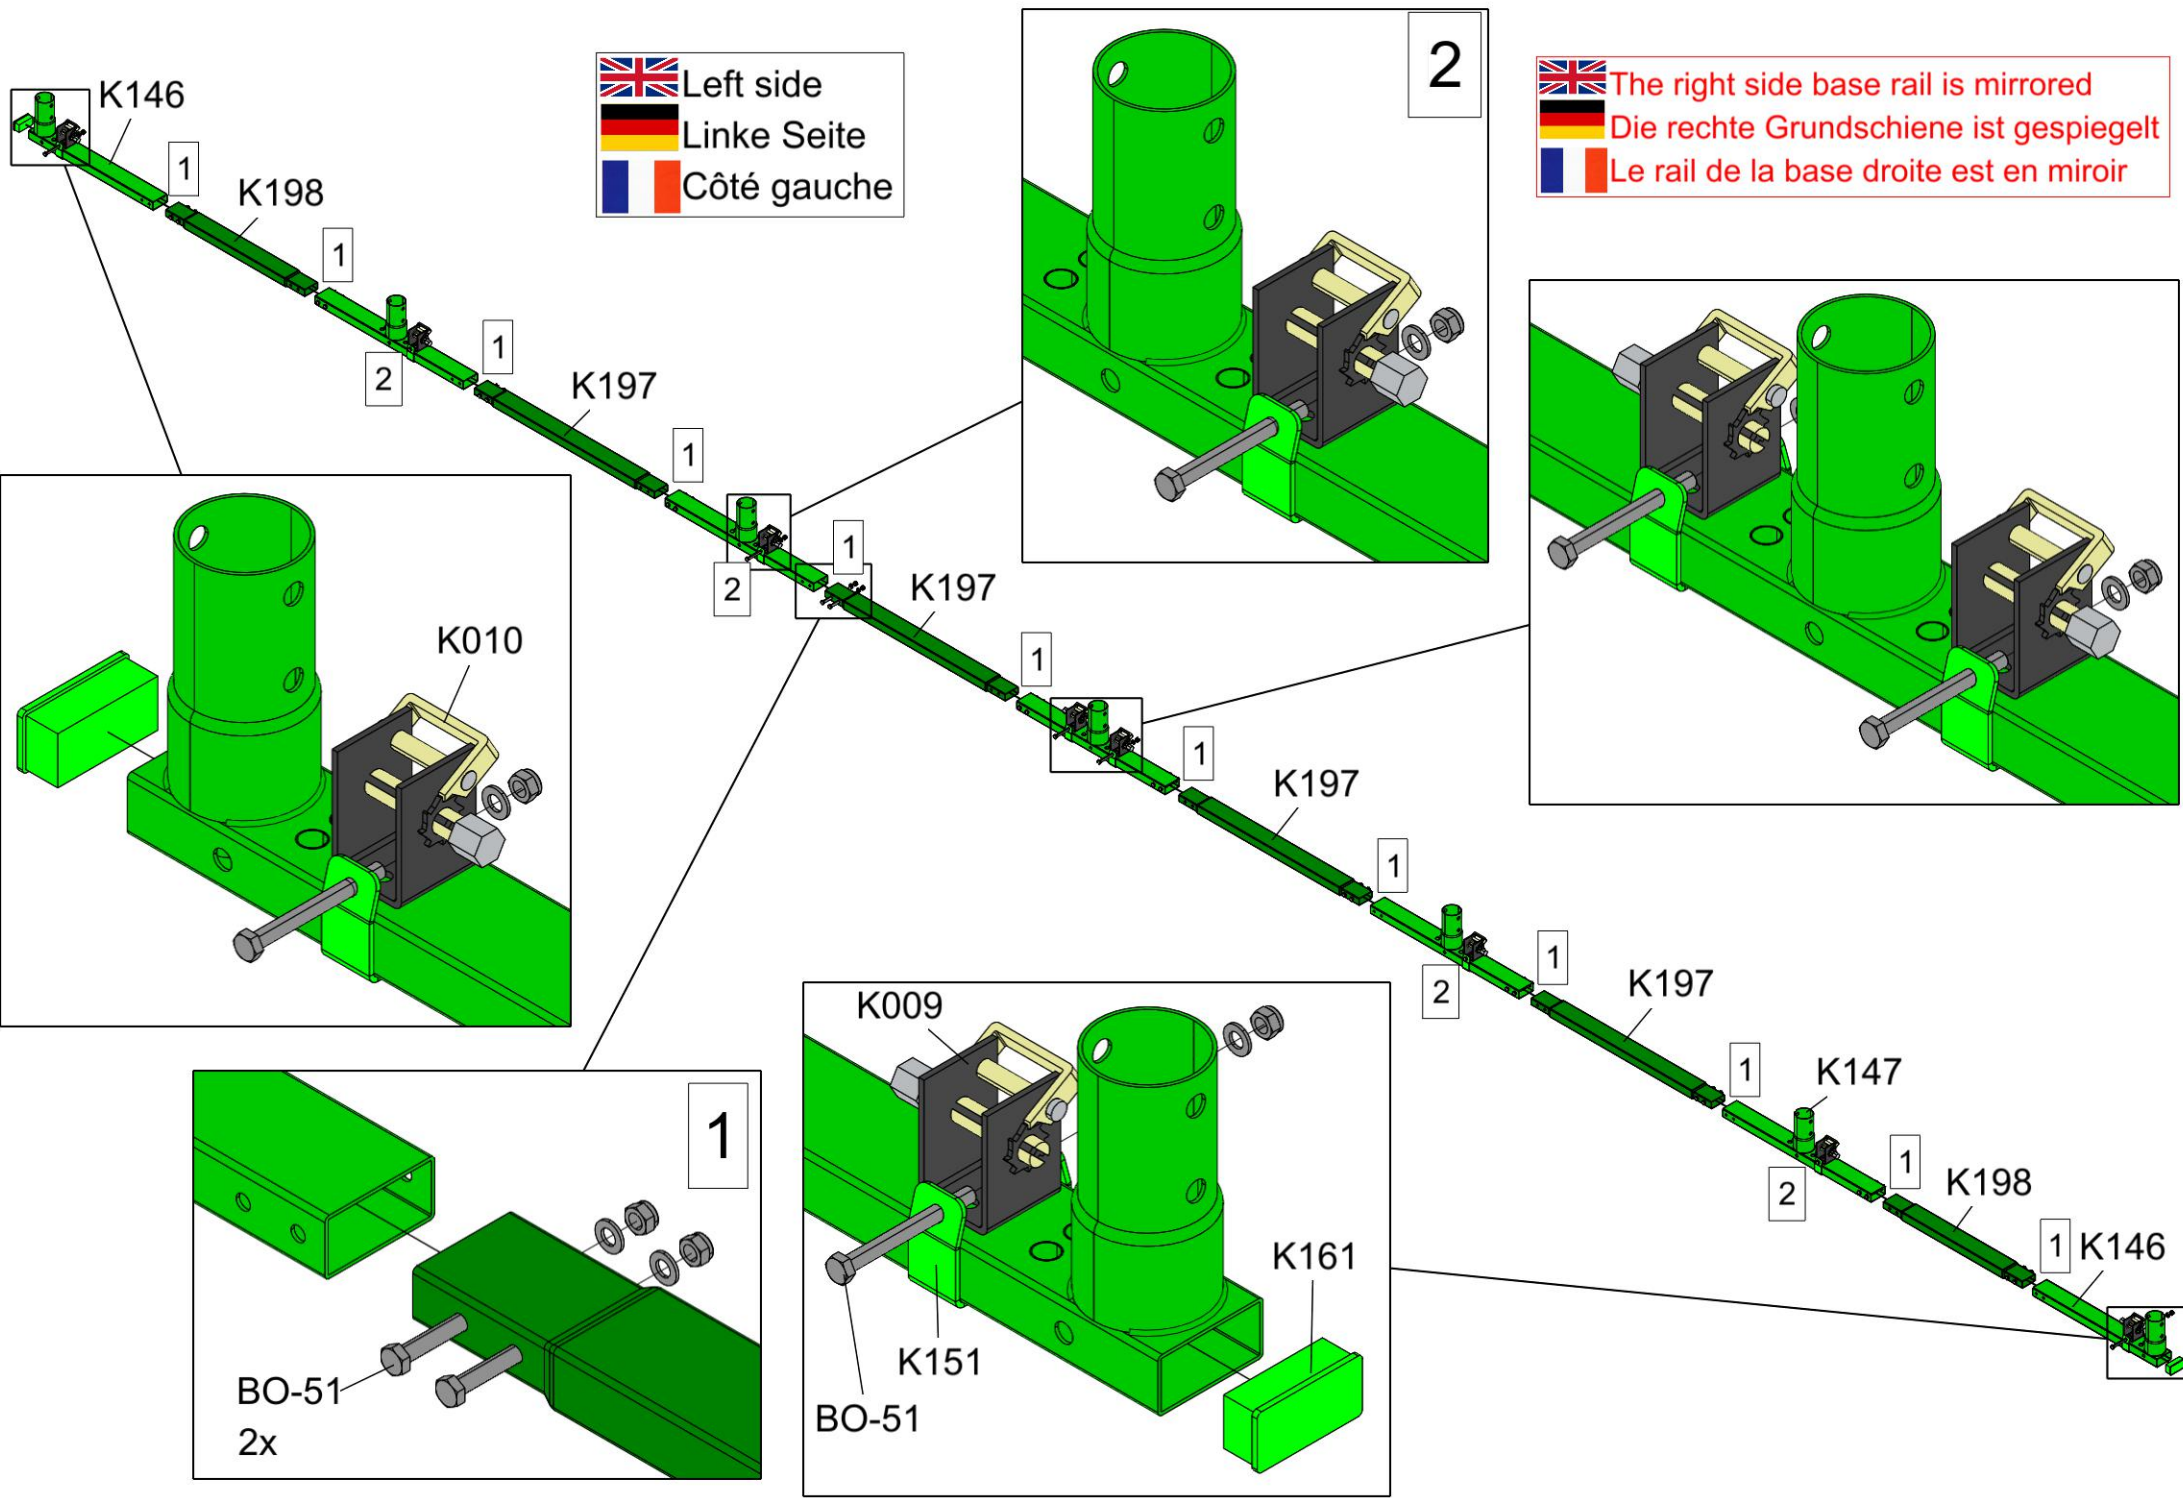

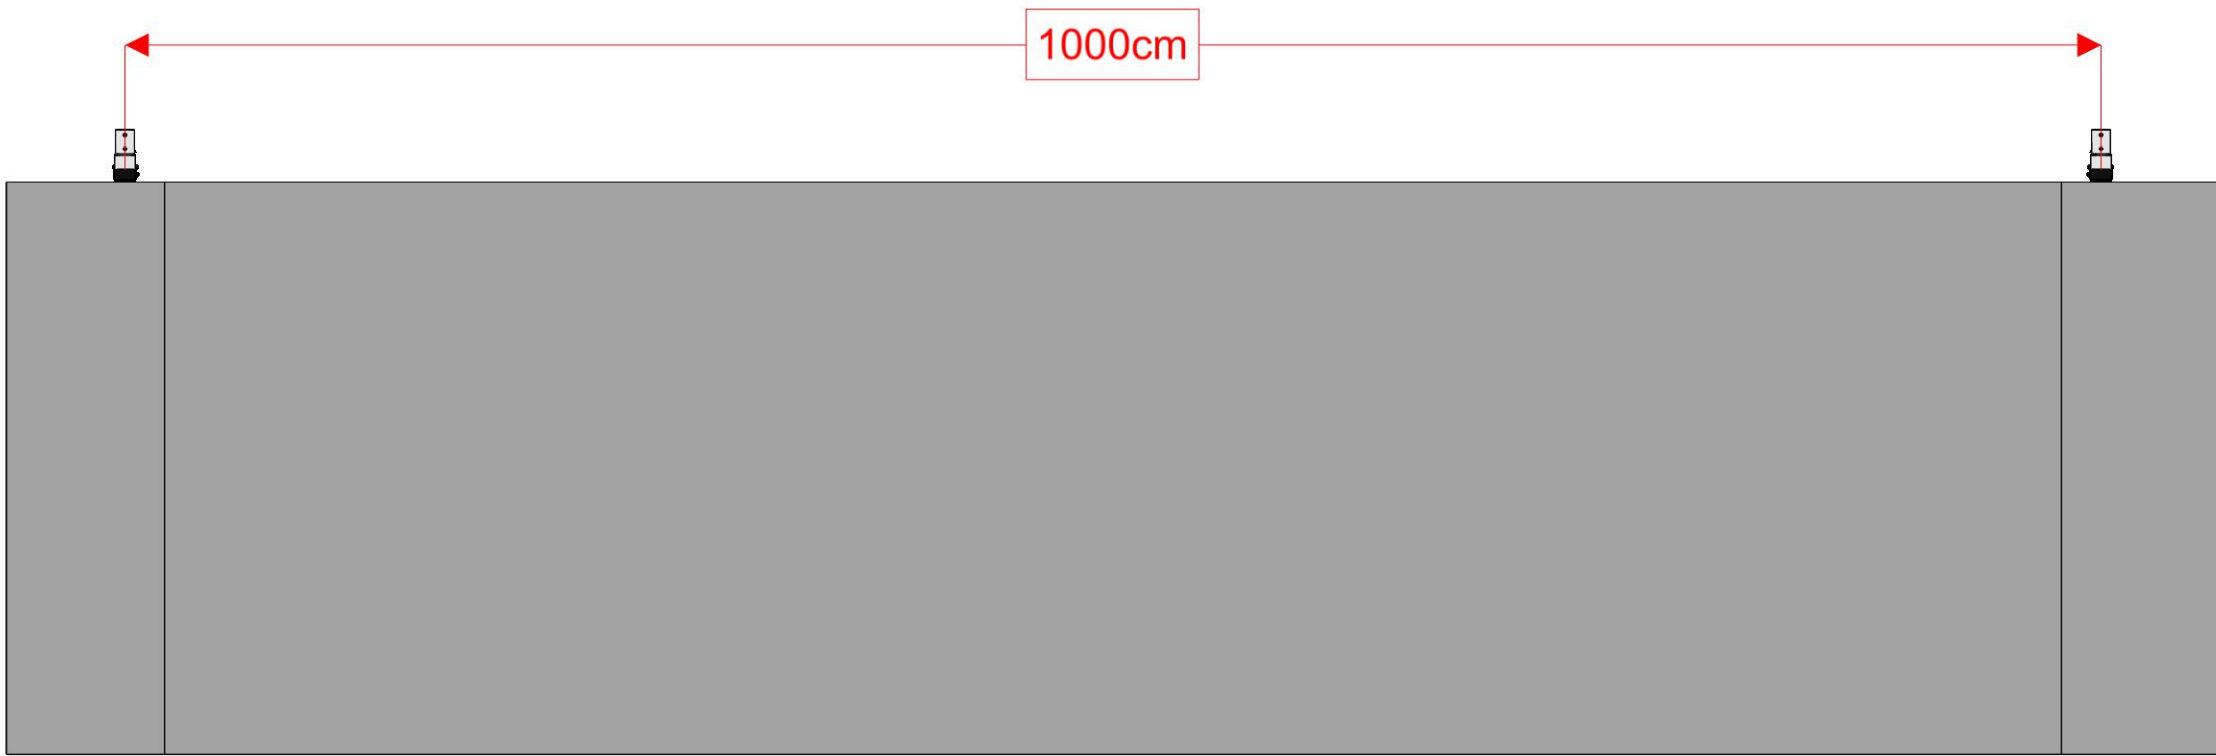




Use filler plates to level the base rails, minimum 5mm thickness




Verwenden Sie Ausgleichsplatten, um die Grundschiene auszugleichen, Mindeststärke 5 mm.




Utilisez des plaques de remplissage pour mettre à niveau les rails de base, d'une épaisseur minimale de 5 mm.

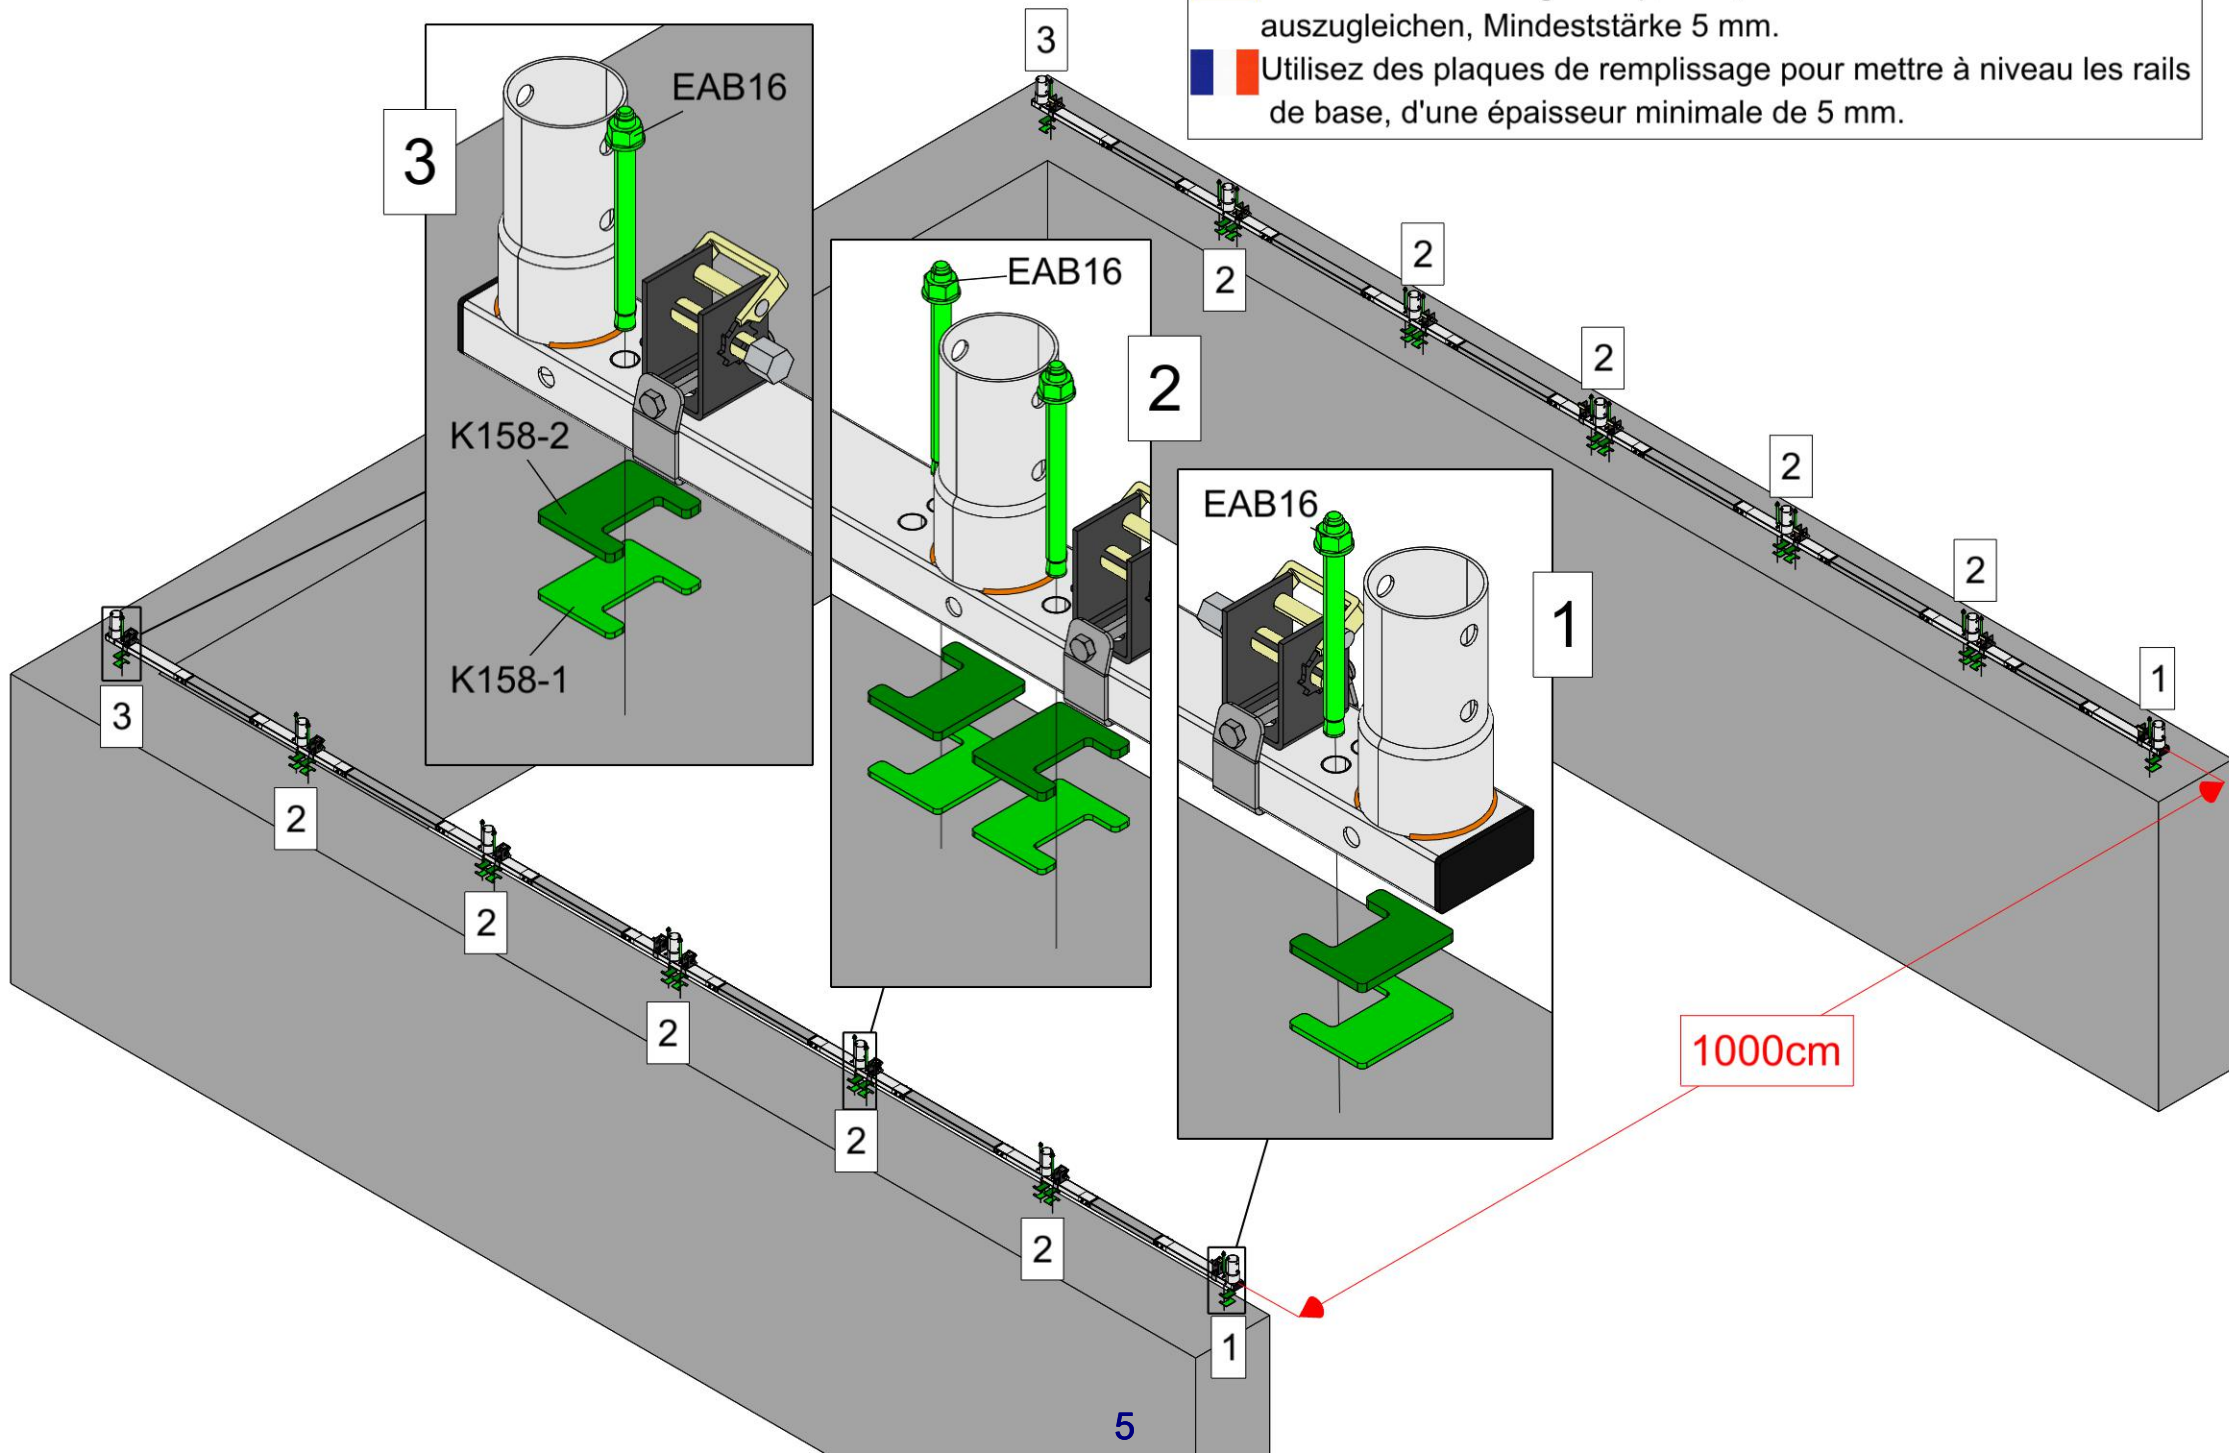

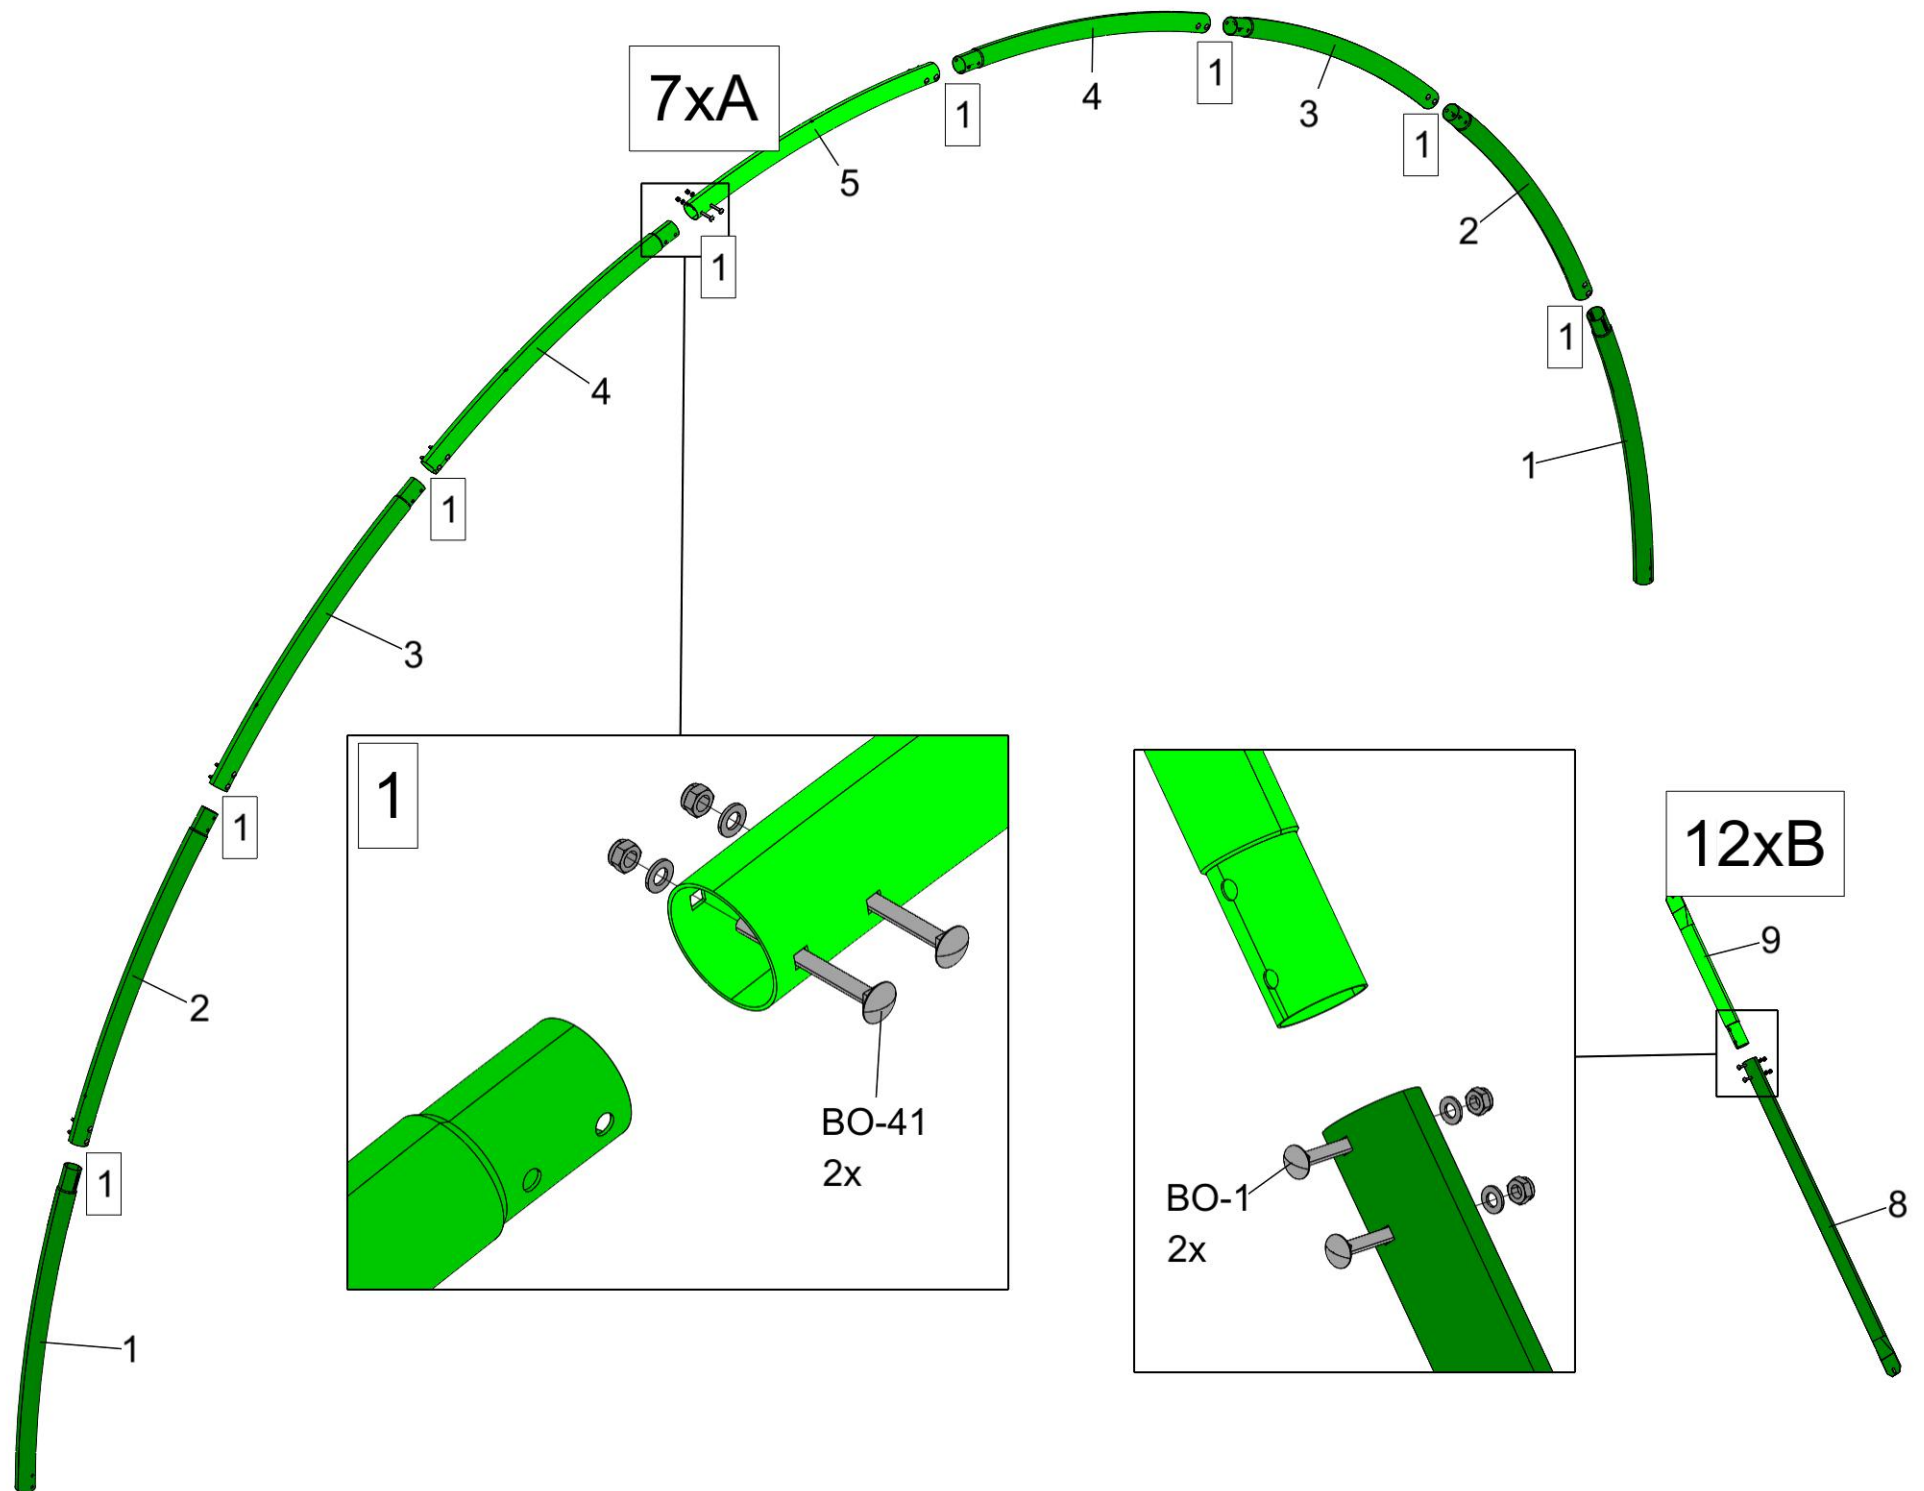

1

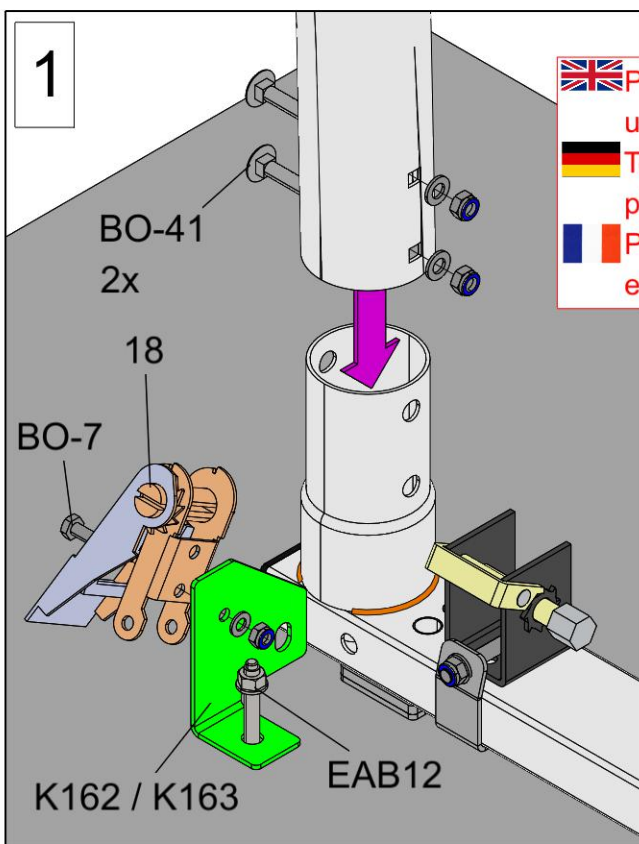

- Place "K162 / K163" part using only EAB12
- Teil "K162 / K163" nur mit EAB12 platzieren
- Placer la pièce "K162 / K163" en utilisant uniquement EAB12



When placing the first and last arch make sure the boltheads point outwards



Achten Sie beim Anbringen des ersten und letzten Bogens darauf, dass der Schraubenkopf nach außen zeigt.



Lorsque vous placez le premier et le dernier arc, veillez à ce que la tête de boulon soit orientée vers l'extérieur.

